

12 Helen St Heidelberg West VIC 3081  
Ph (03) 9459 9907 Fax (03) 9459 6560


Pty Ltd

[www.lockitwell.com.au](http://www.lockitwell.com.au) for Full Product Information

## “E Series” Elevator


High Strength  
Brass Material

High Quality  
Switch Contacts

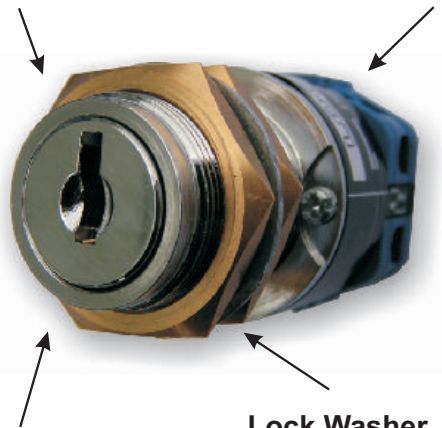


Incorporates YA17, YA17R  
and LW3 Keyways

Lock Washer

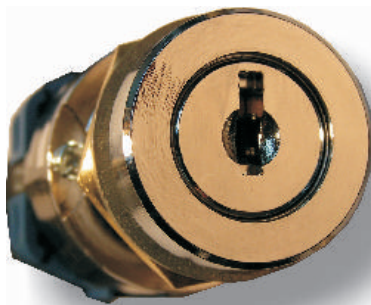

Note: Bezel Mount Cutout  
Size = 20.5mm

“A” mm

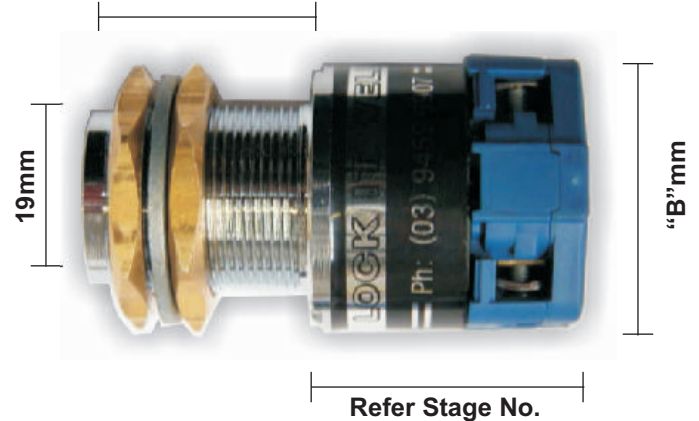


Refer Stage No.

Lift Mount	“A”	Stage		“B”
		1	2	
Waffer	24mm	-	-	-
Bilock	29mm	-	-	-
Medeco	32mm	-	-	-
Digit 5 = 5	-	28mm	36mm	33mm
Digit 5 = 1,4,7	-	30mm	40mm	43mm
Digit 5 = 2	-	34mm	47mm	47mm

Note: Refer to Switch Circuits for Stage No.

Hi-tech multi  
voltage contacts



The "E" series is primarily designed for use on Lifts and elevators. It meets the strict elevator regulations and can be supplied to suit standard or unique lift key codes. Circuits to suit most lift manufactures are available off the shelf.

Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2008

E-Series  
2008

## How To Order



The Example shown is for a E-Series Wafer keyed, Lift mount, with key removal in 2 positions with a multi-voltage switch.

# EC325120

Digit 1  
"Removable Series"

**Digit 2**  
"Lock Type"

**C Wafer** YA17, LW3  
**M Medeco**  
**Q Bilock QCC**  
**R Wafer Reverse** YA17R  
**U Medeco Removable**

**Digit 3**  
"Mounting"

2 Bezel

3 Lift

**Digit 4**  
"Key Removal"

1 Position  
 2 Position  
 3 Position

Spring Return=1 Position.  
 If Key Captive Required  
 Please Indicate Position.

**Digit 5**  
"Electrical Rating"

1 - High Voltage<sup>(Standard)</sup>  
 Silver Button Contacts  
 AC21A 20Amp  
 DC1 24V-20Amp

2 - High Voltage/Amps  
 Silver Button Contacts  
 AC21A 32Amp  
 DC1 24V-25Amp

4 - Low Current<sup>(Low Bounce)</sup>  
 Silver H-Bridge Contacts  
 AC21A 12V-5Amp  
 DC1 12V-3Amp

5 - Multi Volt<sup>(Standard Small)</sup>  
 Special Multi-Voltage Contacts  
 AC21A -10Amp  
 DC1 24V-6Amp

7 - PLC Data<sup>(Low Bounce)</sup>  
 Gold H-Bridge Contacts  
 AC21A 12V-2Amp  
 DC1 12V-1.5Amp

**Digit 6,7&8**  
"Switch Circuits"

Note: Please refer to the relevant circuit brochure attached or available online at [www.lockitwell.com.au](http://www.lockitwell.com.au) under the downloads section of the lift switches

<p>Two Position Circuit Brochure ID: LCIRC4</p>	<p>Three Position Circuit Brochure ID: LCIRC5</p>
<p>Two Position with Spring Return Circuit Brochure ID: LCIRC6</p>	<p>Spring Return One Way Circuit Brochure ID: LCIRC7</p>

**\*\*Note\*\***

Almost any circuit can be produced on request

## Studless Surrounds Types

Available in Silver, Red and Black as Standard




**Large Studless**  
 LIW Order Code "D-Studless"  
 Diameter = 40mm / Hole Size = 36mm  
 Order with Lift Mounting Only



**Medium Studless**  
 LIW Order Code "O-Studless"  
 Diameter = 36mm / Hole Size = 33mm  
 Order with Lift Mounting Only



**Small Studless**  
 LIW Order Code "S-Studless"  
 Diameter = 31mm / Hole Size = 28mm  
 Order with Lift Mounting Only

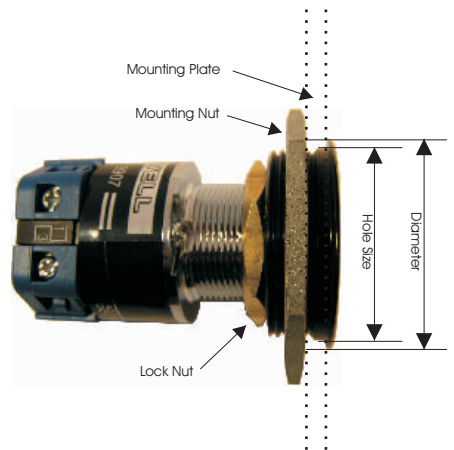

Others colours available on request: